


Static Control Lennite®

(static control UHMW-PE)

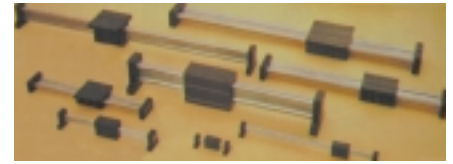

LENNITE® CN-P (Conductive Ultra-High Molecular Weight Polyethylene) Carbon-powder-filled, self-lubricating, conductive material with excellent abrasion-resistance and high impact strength. This material is lightweight and easily machined, has good chemical and stress-crack resistance, and good wear-resistance.

LENNITE® SD-P (Static-dissipative Ultra-High Molecular Weight Polyethylene) Carbon-powder-filled, self-lubricating, moisture-repellent material with resistivity levels in the 10⁵ - 10⁹ range. This material has the highest impact strength, is lightweight, has excellent abrasion resistance, and possesses good chemical and stress-crack resistance.

The following physical property information is based on typical values of the resin.

	Units	ASTM Test	Lennite CN-P	Lennite SD-P
Mechanical				
Tensile strength @yield	psi	D638	5,700	3,130
Tensile elongation @break	%	D638	390.0	310.0 ⁽¹⁾
Flexural modulus	psi	D790	140,000	152,000
Izod impact strength				
Notched	ft•lbs/in	D256	No Break	–
Hardness–Shore D		D2240	70	67
Thermal				
Coefficient of thermal expansion	in/in/°F	D696	–	7.2x10 ⁵
Heat deflection temperature				
@264 psi	°F	D648	–	115
@66psi	°F	D648	–	174
Electrical				
Surface resistivity dry	ohm/sq	D257	10 ² - 10 ⁶	12.0x10 ⁶
Volume resistivity dry	ohm/cm	D257	10 ² - 10 ⁶	1.9x10 ⁷
Other				
Specific gravity		D792	0.969	0.935
Water absorption @24 hours	%	D570	–	0.028

⁽¹⁾ Ultimate elongation

Applications Include:

- Metal replacement components
- Bulk material handling equipment
- Weigh/fill equipment components
- Hopper/chute linings
- Explosives handling equipment

Advantages of Lennite CN-P and SD-P:

- Low carbon loading (slough resistant)
- Self lubricating (low coefficient of friction)
- Excellent wear properties
- Noise dampening properties
- Exceptional abrasion resistance
- Lightweight
- Cost effective
- Very low temperature compatibility

Manufacturing Capabilities:

Sheet: 1/8" to 4" thick

Colors/Grades:

CN-P—Black

SD-P—Black

*In addition to our standard capabilities, Westlake also has the ability to process custom resins in various sizes and colors with some exceptions.

WESTLAKE
PLASTICS COMPANY

World Headquarters
P.O. Box 127, Lenni, PA 19052
1-800-999-1700 • Fax: (610) 459-1084

www.westlakeplastics.com

West Coast Office
377 E. Chapman Ave., Suite 120, Placentia, CA 92870
1-800-440-0597 • Fax: (714) 961-0978